



INSERT IMAGE OF DGO 60
HERE
AWAITING IMAGE

Container shown is a DGO 1000 -120° fitted with a removable open top lid, galvanised frame and a 10" slide valve, with anti-tilts

- A multi-trip silo IBC for the transportation and storage of dry goods
- Open top 'drop on' removable lid
- Steep cone angle; ideal for problematic flowing powders
- 4 way fork lift truck entry
- Designed for stability in storage and transport
- Range of outlet options

DGO 120°

Product Information Sheet

Standard Specification

Dimensions

| | |
|-----------------------------|-------------------|
| Width/Depth/ (mm) | 1180/1180/ |
| Filling inlet diameter (mm) | 350 |
| Outlet diameter (mm) | 200 |
| Tare weight (kg) | See product range |
| Nominal capacity (L) | See product range |

Composition

| | |
|-------------------------------|-------------------------|
| Liner | LMDPE ¹ |
| Framework with anti-tilt bars | Mild Steel (galvanised) |

Options

Valve outlet options including Mucon and Slide
Full fork tunnels on frame (maximum handling stability)
Vinyl logos
Trem card holders
Coloured liner
Anti-static liner

1 – Linear Medium Density Polyethylene
2 – High Density Polyethylene
3 – Silicone Rubber

Description

The DGO 120° is a reusable silo IBC designed for the transportation and storage of dry goods e.g. powders and granules.

The DGO has an open top removable lid. The open top allows for ease of entry / filling and monitoring levels of dry goods.



The DGO liner is rotationally moulded in natural UV stabilised linear medium density polyethylene. The polymer has strong resistance to industrial wear and tear. The 120° conical base is designed to provide total discharge of the contents. The liner is supported and protected by a galvanised mild steel frame, providing excellent resistance to the elements. The base of the frame has integral four way fork truck entry with anti-tilts to improve handling efficiency and is stackable.

The vertical outlet at the base of the liner can be specified with a variety of valves to suit individual applications.

DGO 120° Product Range

| Type | Volume litres | Dimensions Width/Length/Height mm | Weight Kg |
|---------------|------------------|---|--------------|
| DGO 500-120° | 500 | 1180 / 1180 / 1150 | 90 |
| DGO 750-120° | 750 | 1180 / 1180 / 1370 | 100 |
| DGO 1000-120° | 1000 | 1180 / 1180 / 1730 | 115 |
| DGO 1250-120° | 1250 | 1180 / 1180 / 1870 | 125 |
| DGO 1500-120° | 1500 | 1180 / 1180 / 2105 | 135 |
| DGO 1750-120° | 1750 | 1180 / 1180 / 2244 | 145 |
| DGO 2000-120° | 2000 | 1180 / 1180 / 2505 | 160 |
| DGO 2250-120° | 2250 | 1180 / 1180 / 2720 | 165 |

Plan view

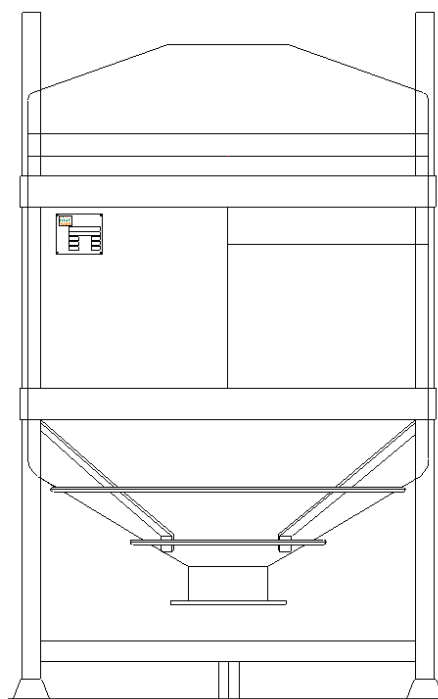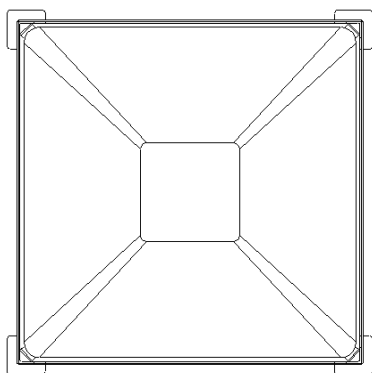

Side elevation

Whilst every attempt has been made to ensure that the information provided in this product information sheet is accurate and reliable Francis Ward Limited cannot accept responsibility for the interpretation of the information provided.

It is the responsibility of the user to determine the chemical compatibility of the container with its intended contents.



Francis Ward Limited

Brook House, 221 Bowling Back Lane, Bradford, BD4 8SJ, UK

Tel: +44 (0)1274 707030 Fax: +44 (0)1274 724704

Email: sales@francisward.com

Website: www.francisward.com